

CAR HAULER COMPETENCE MADE AFFORDABLE

BRIAN JAMES TRAILERS

>> Connected to you





CAR HAULER

Competence made affordable


Car Hauler represents everything that a true Brian James Trailer embodies. Light, low and capable combined with an extremely attractive value for money price.

The choice of lengths, either 4.0m or 4.9m will readily provide for almost any requirement, especially with its 2.0m wide bed. The base trailer can also be specified with 12" or 13" wheels to suit different environments. Brand new operational features include the ability to add a hydraulic tilt-bed facility to any model at any time in the future, innovative assistor ramps for ultra-low clearance loading and LED lighting as standard.

We've included a few extra neat touches such as the extremely easy ramp storage and location system, number plate mounting brackets and low door clearance, all as standard on all models.

Brian James Trailers technically advanced design and manufacturing keeps weight low and durability high. With a 2,600 kg gross capacity you will find a Car Hauler model to suit you.



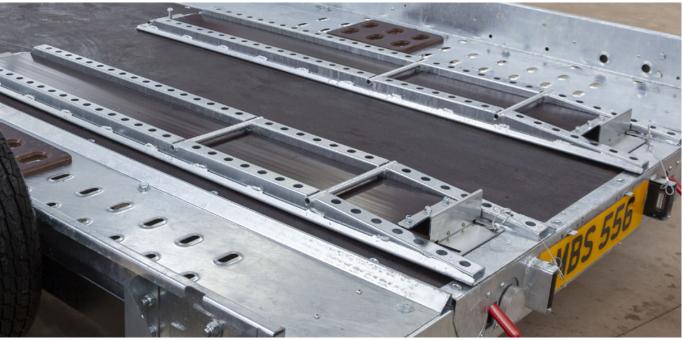



• High grip, low profile punched ramps Grippy, low profile 1.7m loading ramps feature useful lifting handles for easy handling. An innovative optional assistor ramp can be stored in the same space without modification.



• Low Loading angle

Here we can see the benefit of a tilt-bed operation, plus long loading ramps. Cars such as this Radical will also require special assistor ramps which can be specified as an option.



O Tie-down wheel 'sling' straps

Designed to provide multidirectional tension around the vehicle wheel. Soft links prevent any damage to the wheel rims. Essential for safety and piece of mind that your vehicle is tied down correctly. Easy to fit with multiple built-in tiedown points.



O Hydraulic tilt-bed reduces loading angles and can assist in ease of operation.



directly to the chassis bed.

extremely durable. O Wheel chocks, bolt in (pair) Fully adjustable wheel chocks bolt







50mm ball coupling head

Heavy duty jockey wheel

OPTIONAL

Centre deck infill to the centre provides safety and protects the underside of vehicles being transported.

OPTIONAL



Manual winch Auto braked operation manual winch is fitted with steel wire rope and is guided through a set of rollers.

OPTIONAL



Alloy wheels

The Car Hauler range is also available with new B2 style alloy wheels in standard Silver or diamond cut Anthracite for 12" wheels only (Anthracite shown).





MAIN SPECIFICATIONS AND EQUIPMENT

Grossig2,6002,6002,6002,6002,600Load kg2,1022,1022,0022,0022,0022,0022,0022,0022,0022,0022,0022,0022,0022,0022,0022,0032,0002	LOAD BED LENGTH m A	4	4.00		4.90	
load g2,1022,1022,0022,002Unable naise weight g0.80.80.80.80.8DURENSION2.000 <td< th=""><th>CAPACITY</th><th></th><th></th><th></th><th></th></td<>	CAPACITY					
Understander weight ig Difference94%94%95%95%Difference000 <t< td=""><td>Gross kg</td><td>2,600</td><td>2,600</td><td>2,600</td><td>2,600</td></t<>	Gross kg	2,600	2,600	2,600	2,600	
DMENSIONSVINITYVINITYInternal day with m B2.00 </td <td>Load kg</td> <td>2,102</td> <td>2,102</td> <td>2,082</td> <td>2,082</td>	Load kg	2,102	2,102	2,082	2,082	
Interail bed with m B2002.002.002.002.00Overal traiker with m C2.44<	Unladen trailer weight kg	498	498	518	518	
Operal trainer inquing the C2.4.4	DIMENSIONS					
Overall taking the D5.585.586.486.48Bed leading the (under with standard 12' wheels fitted)0.430.430.430.430.43Dowall height (usdead with standard 12' wheels fitted), centre otwall) in0.470.470.470.47RUNNIC GEAR12' 0.5312' 0.5	Internal bed width m B	2.00	2.00	2.00	2.00	
Bed load hight (unladen with standard 12° wheels fitted, centre of towall) m0.430.430.430.430.43Towall height (loaded with standard 12° wheels fitted, centre of towall) m0.470.470.470.47Towall height (loaded with standard 12° wheels fitted, centre of towall) m22222222213° (ds.R1)Auts12° (fs.77)13° (fs.R1)13° (fs.R1)<	Overall trailer width m C	2.44	2.44	2.44	2.44	
Total height (laded with standed 12' wheels fitted, centre of towall) mean0.470.470.470.47RUNNER GENERRestance from the standard 12' wheels fitted, centre of towall) mean222222Restance from the standard 12' wheels fitted, centre of towall mean22 <t< td=""><td>Overall trailer length m D</td><td>5.58</td><td>5.58</td><td>6.48</td><td>6.48</td></t<>	Overall trailer length m D	5.58	5.58	6.48	6.48	
RUNNING GEAR I <t< td=""><td>Bed load height m (unladen with standard 12" wheels fitted)</td><td>0.43</td><td>0.43</td><td>0.43</td><td>0.43</td></t<>	Bed load height m (unladen with standard 12" wheels fitted)	0.43	0.43	0.43	0.43	
Alse2222Whend by resize12° (15070)13° (165 RTB)12° (15070)13° (165 RTB)Sealed whend bearings, maintenance free12° (15070)13° (165 RTB)12° (15070)13° (165 RTB)Sealed whend bearings, maintenance free000000TALLEE USAID12° (15070)13° (165 RTB)12° (15070)13° (165 RTB)Accessores00	Towball height (loaded with standard 12" wheels fitted, centre of towball) m	0.47	0.47	0.47	0.47	
Wheel / tyre size12° (tsorm)12° (tsorm)12° (tsorm)12° (tsorm)Seale wheel bearings, maintenance freeImage: Seale S	RUNNING GEAR					
Select And Peel Bearings, maintenance free•••••••••TRALLER LIGHTINGTRALLER LIGHTINGFull 24 LD trailer lighting, front marker lamps, stop, tail, indicators and registration plate00000Colspan="2">Colspan="2">Colspan="2">Colspan="2">Colspan="2">Colspan="2">Colspan="2">Colspan="2">Colspan="2">Colspan="2"Manual windw with auto brake and free spool00 <td>Axles</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td>	Axles	2	2	2	2	
TAILLER LIGHTING Image: Constraint of the second registration plate Image: Constraint of the second registration plate Image: Constraint of the second registration plate Full 12v LED trailer lighting, front marker lamps, stop, tail, indicators and registration plate Image: Constraint of the second registration plate Image: Constratis plate Image: Constraint of the second	Wheel / tyre size	12" (155/70)	13" (165 R13)	12" (155/70)	13" (165 R13)	
Full 12v LED trailer lighting, front marker lamps, stop, tail, indicators and registration plateImage: constraint of the stop	Sealed wheel bearings, maintenance free	•	•	•	•	
ACCESSORIESManual winch with auto brake and free spool000High level tyre rack0000Wheel chocks (pair)00000Centre deck000000ICADING, WHEELS AND SECURITY000000Spare wheel00000000Hydraulic tilt-bed operation000 <td>TRAILER LIGHTING</td> <td></td> <td></td> <td></td> <td></td>	TRAILER LIGHTING					
Manual winch with auto brake and free spool00000High level tyre rack000	Full 12v LED trailer lighting, front marker lamps, stop, tail, indicators and registration plate	•	•	•	•	
High level tyre rack00000Wheel chocks (pair)00 <td>ACCESSORIES</td> <td></td> <td></td> <td></td> <td></td>	ACCESSORIES					
Weel chcks (pair)0000Centre deck00000LADING, WHEELS AND SECURITYSpare wheel00000Hydraulic tilt-bed operation00000Alloy wheels - lightweight (Style B2 Anthracite diamond cut or standard Silver) + safety locking wheel bolts (12" wheels only)00000Rear loading supports (for use with non-tilting beds only)000 </td <td>Manual winch with auto brake and free spool</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td>	Manual winch with auto brake and free spool	0	0	0	0	
Centre deck0000LOADING, WHEELS AND SECURITYSpare wheel000 </td <td>High level tyre rack</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td>	High level tyre rack	0	0	0	0	
LOADING, WHEELS AND SECURITY Spare wheel 0 <td>Wheel chocks (pair)</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td>	Wheel chocks (pair)	0	0	0	0	
Spare wheel00000Hydraulic till-bed operation00 <td>Centre deck</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td>	Centre deck	0	0	0	0	
Hydraulic tilt-bed operation0000Alloy wheels - lightweight (Style B2 Anthracite diamond cut or standard Silver) + safety locking wheel bolts (12" wheels only)0-0-Rear loading supports (for use with non-tilting beds only)000000Tie-down wheel 'sling' straps x 4 - 2,500 DaN000	LOADING, WHEELS AND SECURITY					
Alloy wheels - lightweight (Style B2 Anthracite diamond cut or standard Silver) + safety locking wheel bolts (12" wheels only) 0 - 0 - 0 </td <td>Spare wheel</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td>	Spare wheel	0	0	0	0	
Rear loading supports (for use with non-tilting beds only)0000Tie-down wheel 'sling' straps x 4 - 2,500 DaN000000Tie-down straps x 4 - 4000 DaN heavy duty0000000EXTERIORPRODUCTS	Hydraulic tilt-bed operation	0	0	0	0	
Tie-down wheel 'sling' straps x 4 – 2,500 DaN 0 0 0 0 Tie-down straps x 4 – 4000 DaN heavy duty 0 0 0 0 EXTERIOR 0 0 0 0 Coloured body trim - Black 0 0 0 0 PRODUCTS 0 0 0 0	Alloy wheels - lightweight (Style B2 Anthracite diamond cut or standard Silver) + safety locking wheel bolts (12" wheels only)	0	-	0	-	
Tie-down straps x 4 – 4000 DaN heavy duty 0 0 0 0 EXTERIOR Coloured body trim - Black 0 0 0 0 PRODUCTS F F F F	Rear loading supports (for use with non-tilting beds only)	0	0	0	0	
EXTERIOR Coloured body trim - Black PRODUCTS	Tie-down wheel 'sling' straps x 4 – 2,500 DaN	0	0	0	0	
Coloured body trim - Black PRODUCTS	Tie-down straps x 4 – 4000 DaN heavy duty	0	0	0	0	
PRODUCTS	EXTERIOR					
	Coloured body trim - Black	•	٠	•	•	
Product code 145-1210 145-1211 145-3210 145-3211	PRODUCTS					
	Product code	145-1210	145-1211	145-3210	145-3211	



QUALITY

Brian James Trailers are manufacturers of class leading trailers, since 1979. When you buy a Brian James Trailer you can be absolutely certain that it is designed and constructed to the highest possible standards. Our Engineers combine top-quality craftsmanship with the best materials and first-class presentation. Light but strong, our trailers are crafted to enhance safety, efficiency and durability.

5 Year Extended Chassis Warranty

This Brian James Trailer is provided to you with a standard 1 year nontransferable manufacturers warranty covering the integrity of the chassis, which can be extended to 5 years upon registration.

We warrant that under normal use, outside of accident damage or misuse (meaning driven across unsuitable territory or being overloaded) the chassis will not fatigue or fail to be able to perform its intended duties safely.

Any repair or rectification as a result of a claim under this warranty will be at Brian James Trailers cost and be carried out either at a Brian James Trailers main dealer, or at the factory HQ in Daventry, UK, at the discretion of Brian James Trailers Ltd. A repair may involve removal of the original galvanised surface finish, for which we will not liable to reinstate to its original state.

Brian James Trailers will not be liable for any consequential loss in connection with a claim on this warranty, including recovery fees or transport to or from the place of final repair.

5 year extended warranty applies to the chassis only. All other components are subject to a standard 1 year warranty, subject to fair wear and tear.

Standards





2.00

DUNL

CAR HAULER COMPETENCE MADE AFFORDABLE

★ 1 year warranty as standard. Additional 4 year warranty period requires product registration.



BRIAN JAMES TRAILERS

>> Connected to you

NOTES

Specifications are subject to change without notice. Illustrations and photography may depict optional equipment.

www.brianjames.co.uk

© BRIAN JAMES TRAILERS LIMITED Printed in the UK

Edition CHAUL2019 Q4_1

Brian James Trailers Limited. Sopwith Way, Drayton Fields Industrial Estate Daventry, Northampton, NN11 8PB

T + 44 (0)1327 308 833

Brian James Trailers are available by contacting our sales team as well as through an extensive network of official dealers throughout the country.

For more information please call or visit our website

www.brianjames.co.uk



THE QUEEN'S AWARDS FOR ENTERPRISE: INTERNATIONAL TRADE 2018

Dealer information

