

CARGO ALL PLANT TILTBED A specialist with a low approach.

UNITED KINGDOM



CARGO ALL PLANT TILTBED A SPECIALIST WITH A LOW APPROACH

SCOOLS NVELEDS



The **CarGO All Plant Tiltbed** extends the capabilities of the outstanding **All Plant** range, offering the same carefully designed commercial trailers to operators of low, heavy and difficult plant machinery.



CARGO ALL PLANT TILTBED.

CARGO ALL PLANT TILTBED

CARGO ALL PLANT TILTBED

PROFESSIONAL KIT.

Successful plant and machinery transportation is reliant on having the right trailer for the job. When there are a variety of machines or applications to cater for the brand new **CarGO All Plant Tiltbed** range is the right solution. The robust and durable design is obvious at first sight and once in use, so is the depth of expertise in the chassis and design detail. Traditionally difficult machines are easily transported.





• Adjustable punched ramps are standard on the All Plant Tiltbed, each ramp can be positioned independently across the full width in seconds.

• Reinforced anti slip deck ensures that destructive equipment such as rollers and mini diggers will not cause structural damage.

O Twin ramp 'knife edge' loading panel with gas spring assistance shown in main picture on page 5.






CARGO ALL PLANT TILTBED

CARGO ALL PLANT TILTBED

ALL THE BITS.

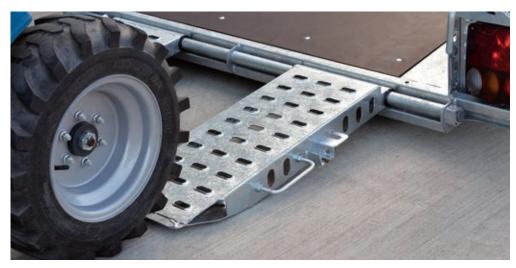



• Adjustable punched ramps provide low loading angle for all types of vehicles. Each ramp can be positioned across the full width in seconds. Constructed from galvanised steel, punched for high grip. Unique nylon hinge sleeves eradicate unwanted rattles.

• Robust protection provided to rear lamp clusters.



• ACME thread clamps. Silent locked – the loading tail ramp is held in place with secure clamp fasteners. A rubber buffer is part of the system and provides damping for quiet travel.



O Twin ramp 'knife edge' loading panel with gas spring assistance. The loading panel has all the benefits of a full panel and provides durability for tracked machine transport. The ramp facilitates a low loading angle.



Gas spring assisted tail ramp ensures that lifting operation regulations are easily met.

• Side lift handles for your convenience.



- Spare wheel mounted on the side.
- Front marker lamps.

• Rope hooks / slots. Multiple attachment hooks and slots along both sides and front for securing loads.

• Galvanised steel chassis. Strong and light.





• Jockey wheel. Auto retractable heavy duty jockey wheel. Features anti vibration latch.

• Powerful **hydraulic pump** and **ram**.

• Locking pin safety device.







• Mudguards are fully integrated into the chassis for total durability. High grip surface offers operator safety.





O Tie-down straps heavy duty, set of 4 for easy and secure fastening of machinery.


O Machine stop bar

Set up to provide

consistent load positioning.

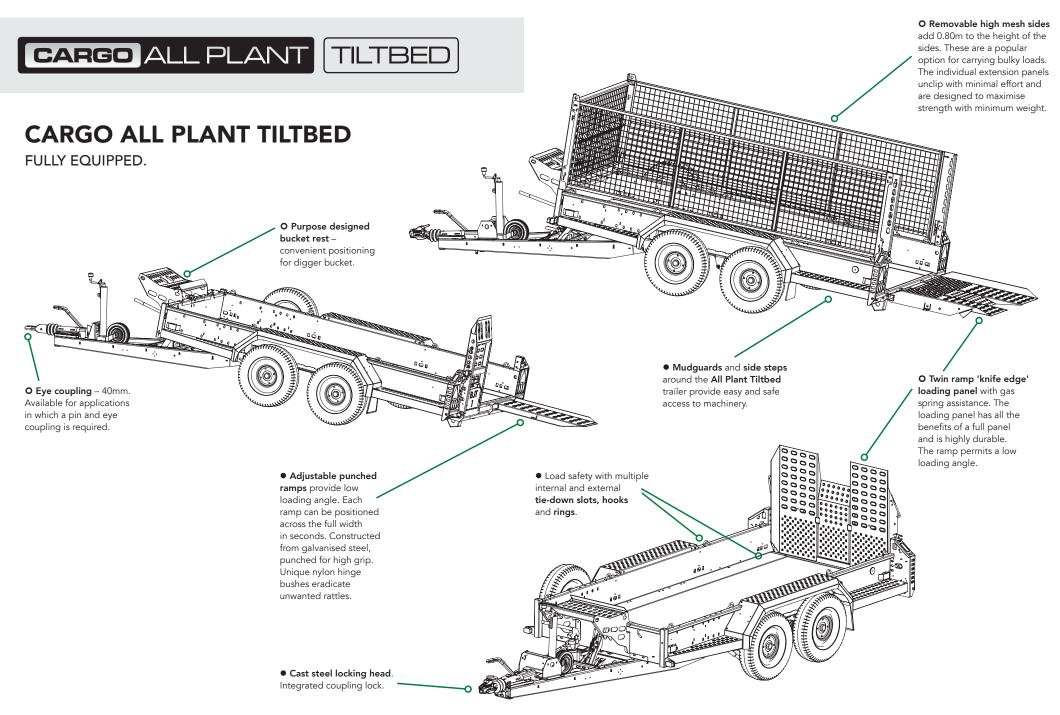





TECHNICAL INFORMATION.

| LOAD BED LENGTH m A | | 3.10 | | | 3.70 | | | |
|---|---------------|---------------|---------------|--------------|--------------|---------------|--------------|--------------|
| CAPACITY | | | | | | | | |
| Gross kg | 2,700 | 2,700 | 2,700 | 3,500 | 3,500 | 2,700 | 3,500 | 3,500 |
| Load kg | 2,100 | 2,070 | 2,022 | 2,789 | 2,740 | 2,033 | 2,751 | 2,710 |
| DIMENSIONS | | | | | | | | |
| Internal bed width m B | 1.30 | 1.60 | 1.85 | 1.60 | 1.85 | 1.60 | 1.60 | 1.85 |
| Overall trailer width m C | 1.82 | 2.12 | 2.33 | 2.12 | 2.37 | 2.12 | 2.12 | 2.37 |
| Overall trailer length m D | 4.81 | 4.76 | 4.81 | 4.80 | 4.80 | 5.43 | 5.43 | 5.43 |
| Bed load height m | 0.38 | 0.40 | 0.40 | 0.38 | 0.40 | 0.40 | 0.39 | 0.39 |
| Working load angle | 14° | 14° | 14° | 13° | 13° | 14° | 13° | 13° |
| RUNNING GEAR AND SECURITY | | | | | | | | |
| Axles | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Wheel / Tyre size | 13" (165 брг) | 13" (165 6pr) | 13" (165 6pr) | 13" (195/50) | 13" (195/50) | 13" (165 6pr) | 13" (195/50) | 13" (195/50) |
| Spare wheel | ۰ | • | ٠ | ٠ | ٠ | ٠ | ٠ | • |
| Tie-down anchor points (internal) | 16 points | 16 points | 16 points | 16 points | 16 points | 16 points | 16 points | 16 points |
| Tie-down straps x 4 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Wheels-Safety kit – torque wrench + digital tyre pressure gauge | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Cast steel coupling head with integral high security lock | ٠ | • | ٠ | ٠ | • | ٠ | ٠ | • |
| 40mm eye coupling | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Datatag – Security identification system | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| BED AND REAR LOADING | | | | | | | | |
| Reinforced heavy duty deck bed | ٠ | • | • | • | • | ٠ | ٠ | • |
| Aluminium tread plate bed lining | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Adjustable position "high grip" punched ramps x 2 | ۰ | • | ٠ | ٠ | ٠ | ٠ | ٠ | • |
| Twin ramp "knife edge" loading panel + gas spring assistance | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| SIDE OPTIONS | | | | | | | | |
| High mesh side extensions 0.80m (removable) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Machine stop bar | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| BUCKET REST | | | | | | | | |
| Digger bucket rest | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PRODUCTS | | | | | | | | |
| Product code | 541-1110 | 541-1120 | 541-1130 | 541-1310 | 541-1320 | 541-2110 | 541-2310 | 541-2320 |

• Standard. • Optional at extra cost.

CARGO ALL PLANT TILTBED.

CARGO ALL PLANT TILTBED

QUALITY

Brian James Trailers are manufacturers of class leading trailers, since 1979. When you buy a Brian James Trailer you can be absolutely certain that it is designed and constructed to the highest possible standards. Our Engineers combine top-quality craftsmanship with the best materials and first-class presentation. Light but strong, our trailers are crafted to enhance safety, efficiency and durability.

5 Year Chassis Warranty

This Brian James Trailer is provided to you with a non-transferable manufacturers warranty covering the integrity of the chassis for a period of 5 years from the date of first registration.

We warrant that under normal use, outside of accident damage or misuse (meaning driven across unsuitable territory or being overloaded) the chassis will not fatigue or fail to be able to perform its intended duties safely.

Any repair or rectification as a result of a claim under this warranty will be at Brian James Trailers cost and be carried out either at a Brian James Trailers main dealer, or at the factory HQ in Daventry, UK, at the discretion of Brian James Trailers Ltd. A repair may involve removal of the original galvanised surface finish, for which we will not liable to reinstate to its original state.

Brian James Trailers will not be liable for any consequential loss in connection with a claim on this warranty, including recovery fees or transport to or from the place of final repair.



CARGO ALL PLANT TILTBED TRAILER GO CONFIGURE TO YOUR NEEDS





BRIAN JAMES TRAILERS

>> Connected to you

NOTES

Specifications are subject to change without notice. Illustrations and photography may depict optional equipment.

www.brianjames.co.uk

© BRIAN JAMES TRAILERS LIMITED. Printed in the UK.

Edition CGAPTILT2016_Q1_1

Brian James Trailers Limited. Sopwith Way, Drayton Fields Industrial Estate Daventry, Northampton, NN11 8PB

T + 44 (0)1327 308 833

Brian James Trailers are available by contacting our sales team as well as through an extensive network of official dealers throughout the country.

For more information please call or visit our website. www.brianjames.co.uk Dealer information.

